



ISO 16028 FLUSH FACE HYDRAULIC QUICK COUPLINGS

FE series quick coupling's are manufactured to the new ISO 16028 standard and are interchangeable with other couplings manufactured to the same norm. These couplings are manufactured from specialty steels and all wear surfaces are induction hardened . 5000 PSI is the maximum operating pressure across all sizes with a 4 to 1 safety factor . No spill design with high pressure , high flow rates and low pressure drops make this coupling very suitable for a wide range of applications.

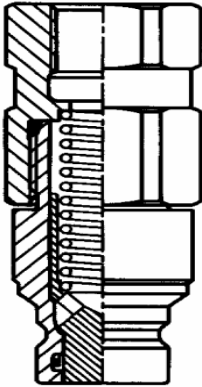

PART NUMBER MALE TIP	THREAD SIZE FEMALE	WORKING PRESSURE (PSI)	RATED FLOW (GPM)
FE491-1-2 FP	1/8" NPT	5000	1.5
FE491-2-4 FP	1/4" NPT	5000	5
FE491-3-6 FP	3/8" NPT	5000	10
FE491-3-8 FP	1/2" NPT	5000	10
FE491-4-8 FP	1/2" NPT	5000	20
FE491-4-10 FO	7/8" - 14 ORB	5000	20
FE491-4-12 FO	1-1/16-12 ORB	5000	20
FE491-4-12 FP	3/4" NPT	5000	20
FE491-5-10 FO	7/8" - 14 ORB	5000	26
FE491-5-12 FO	1-1/16-12 ORB	5000	26
FE491-5-12 FP	3/4" NPT	5000	26
FE491-6-12 FP	3/4" NPT	5000	36
FE491-6-16 FO	1-5/16-12 ORB	5000	36
FE491-6-16 FP	1" NPT	5000	36
FE491-8-20 FO	1-5/8-12 ORB	5000	52
FE491-8-20 FP	1-1/4" NPT	5000	52

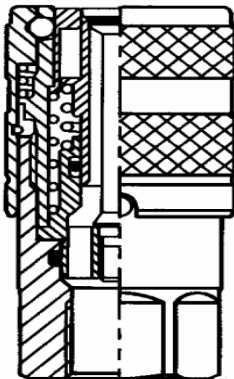

PART NUMBER FEMALE BODY	THREAD SIZE FEMALE	WORKING PRESSURE (PSI)	RATED FLOW (GPM)
FE495-1-2 FP	1/8" NPT	5000	1.5
FE495-2-4 FP	1/4" NPT	5000	5
FE495-3-6 FP	3/8" NPT	5000	10
FE495-3-8 FP	1/2" NPT	5000	10
FE495-4-8 FP	1/2" NPT	5000	20
FE495-4-10 FO	7/8" - 14 ORB	5000	20
FE495-4-12 FO	1-1/16-12 ORB	5000	20
FE495-4-12 FP	3/4" NPT	5000	20
FE495-5-10 FO	7/8" - 14 ORB	5000	26
FE495-5-12 FO	1-1/16-12 ORB	5000	26
FE495-5-12 FP	3/4" NPT	5000	26
FE495-6-12 FP	3/4" NPT	5000	36
FE495-6-16 FO	1-5/16-12 ORB	5000	36
FE495-6-16 FP	1" NPT	5000	36
FE495-8-20 FO	1-5/8-12 ORB	5000	52
FE495-8-20 FP	1-1/4" NPT	5000	52