




## ISO 16028 FLUSH FACE HYDRAULIC QUICK COUPLINGS


FE series quick coupling's are manufactured to the new ISO 16028 standard and are interchangeable with other couplings manufactured to the same norm. These couplings are manufactured from specialty steels and all wear surfaces are induction hardened . 5000 PSI is the maximum operating pressure across all sizes with a 4 to 1 safety factor . No spill design with high pressure , high flow rates and low pressure drops make this coupling very suitable for a wide range of applications. The 492 Series connects under pressure up to 3,600 PSI.

Connect Under Pressure

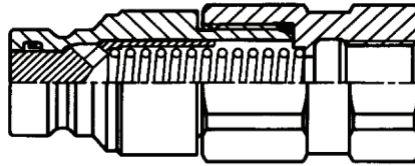


PART NUMBER	THREAD SIZE FEMALE	WORKING PRESSURE (PSI)	MAX CONNECT PRESSURE	RATED FLOW (GPM)
FE492-3-6 FP	3/8" NPT	5000	3600	10
FE492-3-8 FP	1/2" NPT	5000	3600	10
FE492-4-12 FO	1-1/16-12 ORB	5000	3600	20
FE492-4-12 FP	3/4" NPT	5000	3600	20
FE492-6-16 FO	1-5/16-12 ORB	5000	3600	36
FE492-6-16 FP	1" NPT	5000	3600	36

PART NUMBER MALE DUST CAP
FE409-2
FE409-3
FE409-4
FE409-6
FE409-8



PART NUMBER FEMALE DUST PLUG
FE404-2
FE404-3
FE404-4
FE404-6
FE404-8

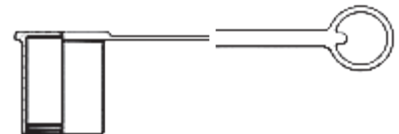

PART NUMBER FLIP CAP FOR FEMALE COUPLING
FE499-3
FE499-4

