


OPK TYPE

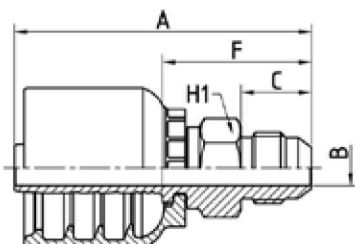

SAE STANDARD CONNECTIONS

OPK12510

JIC MALE 37° CONE - SAE J516 / ISO 12151-5

PART. REF.	HOSE BORE			Thread	DIMENSIONS mm						
	DN	Dash	inch		T	B	A	C	F	H1	
OPK12510-06-06	10	- 6	3/8"	9/16" - 18	7	59	14	29,5	17		
OPK12510-06-08	10	- 6	3/8"	3/4" - 16	9,3	63,5	16,5	34	19		
OPK12510-06-10	10	- 6	3/8"	7/8" - 14	12,5	68	19,5	38,5	24		
OPK12510-08-06	12	- 8	1/2"	9/16" - 18	7	63	14	32	19		
OPK12510-08-08	12	- 8	1/2"	3/4" - 16	9,3	65,5	16,5	34,5	19		
OPK12510-08-10	12	- 8	1/2"	7/8" - 14	12,5	70	19,5	39	24		
OPK12510-08-12	12	- 8	1/2"	1.1/16" - 12	15	74	22	43	27		
OPK12510-10-10	16	- 10	5/8"	7/8" - 14	12,5	73,5	19,5	39	24		
OPK12510-10-12	16	- 10	5/8"	1.1/16" - 12	15	77	22	42,5	27		
OPK12510-12-10	19	- 12	3/4"	7/8" - 14	12,5	78	19,5	41,5	27		
OPK12510-12-12	19	- 12	3/4"	1.1/16" - 12	15	80,5	22	44	27		
OPK12510-12-14	19	- 12	3/4"	1.3/16" - 12	15	81	22,5	44,5	32		
OPK12510-12-16	19	- 12	3/4"	1.5/16" - 12	19,8	83,5	23	47	34		
OPK12510-16-12	25	- 16	1"	1.1/16" - 12	15	93	22	45	32		
OPK12510-16-16	25	- 16	1"	1.5/16" - 12	19,8	96	23	48	34		
OPK12510-16-20	25	- 16	1"	1.5/8" - 12	26	101	24,3	53	42		
OPK12510-20-20	31	- 20	1.1/4"	1.5/8" - 12	26	106	24,3	53,5	42		
OPK12510-20-24	31	- 20	1.1/4"	1.7/8" - 12	32	113	27,5	60,5	50		
OPK12510-24-24	38	- 24	1.1/2"	1.7/8" - 12	32	122,5	27,5	60,5	50		
OPK12510-32-32	51	- 32	2"	2.1/2" - 12	42	138	34	72	65		